

Holtest


For easy and accurate measurement of inside diameters

Digimatic Holtest SERIES 468 — Three-point Internal Micrometers

MeasurLink ENABLED
Data Management Software by Mitutoyo

- Three-point internal micrometer with large LCD readout. (Character height 7.4 mm)
- Titanium-coated measuring pins provide excellent durability and impact resistance and allow the instrument to measure right to the bottom of a blind hole.
- Only one SR44 battery is required and battery life is approx. 1.2 years under normal use.
- ABSolute and INCRemental measurement modes allow highly efficient operation.
- The IP65 protection rating allows the instrument to be used in the presence of splashing coolant.
- Measurements can be made close to the bottom of a blind hole.
- Deep holes can be measured by attaching an extension rod (optional).
- A function lock prevents accidental change of reference point.
- Measurement data output enables operation with Statistical Process Control (SPC) and measurement control systems. Refer to page A-3.
- An interface input tool is available for transferring measurement data, under keyboard control, directly to commercial spreadsheet software. Refer to page A-5.
- Interchangeable-Head Sets (interchangeable measuring heads type) covering an extended measuring range using multiple heads and Non-interchangeable-Head Sets are available.
- For Setting Rings, refer to page C-47.

Range (mm)	L ₃ (mm)	L ₄ (mm)	L ₅ (mm)
6 - 12	2 or below	—	2.5
12 - 20	0.3 or below	5.6	3.5
20 - 30		8.3	5.2
30 - 50		13.0	10.0
50 - 100		17.0	14.0
100 - 300	12.4 or below	21.0	13.8



468-161




468-168



468-174

DIMENSIONS

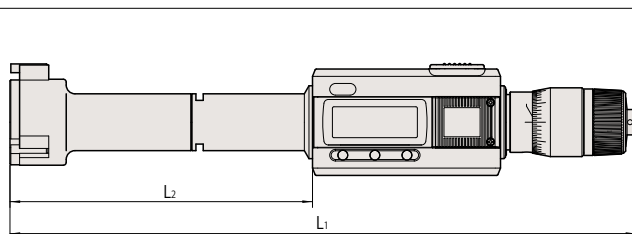

Unit: mm

Range	L ₂	L ₁
6-8, 8-10, 10-12 mm	59	175 - 177
12-16, 16-20 mm	84	197.5 - 201.5
20-25, 25-30 mm	93	206.9 - 211.9
30-40, 40-50 mm	103.8	214.7 - 224.7
50-63, 62-75, 75-88, 87-100 mm	105.4	219.6 - 232.6
100-125, 125-150, 150-175, 175-200, 200-225, 225-250, 250-275, 275-300 mm	151.4	286.3 - 311.3

1) L₂ is maximum depth of measurement possible.
2) External view differs depending on measurement range.

MeasurLink ENABLED
Data Management Software by Mitutoyo

Products equipped with the measurement data output function can be connected to the measurement data network system MeasurLink (refer to page A-5 for details).

IP65

These marks indicate that a product has successfully passed IP65-level testing, which is carried out by the independent German certification organization TÜV Rheinland.



(Refer to page X for details.)



An inspection certificate is supplied as standard. Refer to page X for details.

IP Codes

Level 6: Dustproof.

No ingress of dust allowed.

Level 5: Protected against water jets.

Water projected in jets against the enclosure from any direction shall have no harmful effects.



Technical Data

Display: LCD

Battery: SR44 (1 pc), **938882**,

for initial operational checks (standard accessory)

Battery life: Approx. 1.2 years under normal use

Scale type: Electromagnetic induction-type rotary encoder

Functions


Zero-setting

Origin restoration

Data hold

2-point Preset

Function lock (see illustration of lock symbol below)



inch/mm readout (inch/mm models)

Automatic power ON/OFF

Error alarm

Data output

Optional Accessories

Refer to page A-25 for details.

• USB Input Tool Direct (2 m): **06AFM380B**

• Connecting cables for **U-WAVE-T**

For standard (160 mm): **02AZD790B**

For foot switch: **02AZE140B**

Optional Accessories

Shown mounted on stand using bracket



Mounting bracket
04AZB157

For details of Special-order Products, refer to page C-49.

SPECIFICATIONS

Order No.	Range* ²	Resolution	Accuracy* ¹	Optional Accessories	
				Extension rod	SPC cable
468-161	6 - 8 mm	0.001 mm	±2 μm (within 2 μm)	952322 (100 mm)	05CZA662 (1 m) 05CZA663 (2 m)
468-162	8 - 10 mm				
468-163	10 - 12 mm				
468-164	12 - 16 mm				
468-165	16 - 20 mm				
468-166	20 - 25 mm				
468-167	25 - 30 mm		±3 μm (within 3 μm)	952622 (150 mm)	
468-168	30 - 40 mm				
468-169	40 - 50 mm				
468-170	50 - 63 mm				
468-171	62 - 75 mm				
468-172	75 - 88 mm				
468-173	87 - 100 mm				
468-174	100 - 125 mm				
468-175	125 - 150 mm				
468-176	150 - 175 mm				
468-177	175 - 200 mm				
468-178	200 - 225 mm				
468-179	225 - 250 mm				
468-180	250 - 275 mm				
468-181	275 - 300 mm				

Order No.	Range* ²	Resolution	Accuracy* ¹	Optional Accessories	
				Extension rod	SPC cable
468-261	0.275 - 0.35 in	0.00005 in/ 0.001 mm	±0.0001 in (within 0.0001 in)	952322 (100 mm)	05CZA662 (1 m) 05CZA663 (2 m)
468-262	0.35 - 0.425 in				
468-263	0.425 - 0.5 in				
468-264	0.5 - 0.65 in				
468-265	0.65 - 0.8 in				
468-266	0.8 - 1 in				
468-267	1 - 1.2 in				
468-268	1.2 - 1.6 in				
468-269	1.6 - 2 in				
468-270	2 - 2.5 in				
468-271	2.5 - 3 in		±0.00025 in (within 0.00025 in)	952623 (150 mm)	
468-272	3 - 3.5 in				
468-273	3.5 - 4 in				
468-274	4 - 5 in				
468-275	5 - 6 in				
468-276	6 - 7 in				
468-277	7 - 8 in				
468-278	8 - 9 in				
468-279	9 - 10 in				
468-280	10 - 11 in				
468-281	11 - 12 in				

*1 Excluding quantizing error.

Accuracy: values measured across the entire measuring face.

Maximum difference: differences between the maximum and minimum values.

*2 The measurement range cannot be enlarged by measuring heads that are not standard-supplied (the accuracy is not guaranteed).
Note: Setting rings are optional.



Interchangeable-Head Sets (interchangeable measuring heads type)
For details, refer to page C-5.



Non-interchangeable-Head Sets
For details, refer to page C-6.

Holtest

For easy and accurate measurement of inside diameters

Interchangeable-Head Sets

Metric				Inch/Metric			
Set Order No.	Range*	Content of set	Accessories (optional)	Set Order No.	Range*	Content of set	Accessories (optional)
468-971	6 - 12 mm	Display unit 6 - 12 mm 1 pc Measuring head 6 - 8 mm 1 pc 8 - 10 mm 1 pc 10 - 12 mm 1 pc Setting ring (ø8, ø10) 1 pc each Extension rod (100 mm) 1 pc Spanner 2 pcs Hex wrench 1 pc Phillips screwdriver 1 pc		468-976	0.275 - 0.5 in	Display unit 0.275 - 0.5 in 1 pc Measuring head 0.275 - 0.35 in 1 pc 0.35 - 0.425 in 1 pc 0.425 - 0.5 in 1 pc Setting ring (0.35 in DIA., 0.425 in DIA.) 1 pc each Extension rod (100 mm) 1 pc Spanner 2 pcs Hex wrench 1 pc Phillips screwdriver 1 pc	
468-972	12 - 20 mm	Display unit 12 - 20 mm 1 pc Measuring head 12 - 16 mm 1 pc 16 - 20 mm 1 pc Setting ring (ø16) 1 pc Extension rod (150 mm) 1 pc Spanner 2 pcs Hex wrench 1 pc Phillips screwdriver 1 pc		468-977	0.5 - 0.8 in	Display unit 0.5 - 0.8 in 1 pc Measuring head 0.5 - 0.65 in 1 pc 0.65 - 0.8 in 1 pc Setting ring (0.65 in DIA.) 1 pc Extension rod (150 mm) 1 pc Spanner 2 pcs Hex wrench 1 pc Phillips screwdriver 1 pc	
468-973	20 - 50 mm	Display unit 20 - 50 mm 1 pc Measuring head 20 - 25 mm 1 pc 25 - 30 mm 1 pc 30 - 40 mm 1 pc 40 - 50 mm 1 pc Setting ring (ø25, ø40) 1 pc each Extension rod (150 mm) 1 pc Spanner 2 pcs Hex wrench 1 pc Phillips screwdriver 1 pc	SPC cable with data switch 05CZA662 (1 m) 05CZA663 (2 m)	468-978	0.8 - 2 in	Display unit 0.8 - 2 in 1 pc Measuring head 0.8 - 1 in 1 pc 1 - 1.2 in 1 pc 1.2 - 1.6 in 1 pc 1.6 - 2 in 1 pc Setting ring (1 in DIA., 1.6 in DIA.) 1 pc each Extension rod (150 mm) 1 pc Spanner 2 pcs Hex wrench 1 pc Phillips screwdriver 1 pc	SPC cable with data switch 05CZA662 (1 m) 05CZA663 (2 m)
468-974	50 - 100 mm	Display unit 50 - 100 mm 1 pc Measuring head 50 - 63 mm 1 pc 62 - 75 mm 1 pc 75 - 88 mm 1 pc 87 - 100 mm 1 pc Setting ring (ø62, ø87) 1 pc each Extension rod (150 mm) 1 pc Spanner 2 pcs Hex wrench 1 pc Phillips screwdriver 1 pc		468-979	2 - 4 in	Display unit 2 - 4 in 1 pc Measuring head 2 - 2.5 in 1 pc 2.5 - 3 in 1 pc 3 - 3.5 in 1 pc 3.5 - 4 in 1 pc Setting ring (2.5 in DIA., 3.5 in DIA.) 1 pc each Extension rod (150 mm) 1 pc Spanner 2 pcs Hex wrench 1 pc Phillips screwdriver 1 pc	
468-975	100 - 200 mm	Display unit 100 - 200 mm 1 pc Measuring head 100 - 125 mm 1 pc 125 - 150 mm 1 pc 150 - 175 mm 1 pc 175 - 200 mm 1 pc Setting ring (ø125, ø175) 1 pc each Extension rod (150 mm) 1 pc Spanner 2 pcs Hex wrench 1 pc Phillips screwdriver 1 pc		468-980	4 - 8 in	Display unit 4 - 8 in 1 pc Measuring head 4 - 5 in 1 pc 5 - 6 in 1 pc 6 - 7 in 1 pc 7 - 8 in 1 pc Setting ring (5 in DIA., 7 in DIA.) 1 pc each Extension rod (150 mm) 1 pc Spanner 2 pcs Hex wrench 1 pc Phillips screwdriver 1 pc	

* The measurement range cannot be enlarged by measuring heads that are not standard-supplied (the accuracy is not guaranteed).



Optional Accessories

Refer to page A-25 for details.
 USB Input Tool Direct (2 m): **06AFM380B**
 Connecting cables for **U-WAVE-T**
 For standard (160 mm): **02AZD790B**
 For foot switch: **02AZE140B**

Non-Interchangeable-Head Sets

Metric					Inch/Metric				
Set Order No.	Range* ²	Content of set	Accessories (optional)		Set Order No.	Range* ²	Content of set	Accessories (optional)	
			Extension rod	SPC cable				Extension rod	SPC cable
468-981	6 - 12 mm	Display unit 6 - 8 mm 1 pc 8 - 10 mm 1 pc 10 - 12 mm 1 pc Setting ring (ø8, ø10) 1 pc each Spanner 2 pcs Hex wrench 1 pc Phillips screwdriver 1 pc	100 mm 1 pc		468-986	0.275 - 0.5 in	Display unit 0.275 - 0.35 in 1 pc 0.35 - 0.425 in 1 pc 0.425 - 0.5 in 1 pc Setting ring (0.35 in DIA., 0.425 in DIA) 1 pc each Spanner 2 pcs Hex wrench 1 pc Phillips screwdriver 1 pc	100 mm 1 pc	
468-982	12 - 25 mm	Display unit 12 - 16 mm 1 pc 16 - 20 mm 1 pc 20 - 25 mm 1 pc Setting ring (ø16, ø20) 1 pc each Spanner 2 pcs Hex wrench 1 pc Phillips screwdriver 1 pc	150 mm 2 pcs* ¹		468-987	0.5 - 1 in	Display unit 0.5 - 0.65 in 1 pc 0.65 - 0.8 in 1 pc 0.8 - 1 in 1 pc Setting ring (0.65 in DIA., 0.8 in DIA) 1 pc each Spanner 2 pcs Hex wrench 1 pc Phillips screwdriver 1 pc	150 mm 2 pcs* ¹	
468-983	25 - 50 mm	Display unit 25 - 30 mm 1 pc 30 - 40 mm 1 pc 40 - 50 mm 1 pc Setting ring (ø30, ø40) 1 pc each Spanner 1 pc Hex wrench 1 pc Phillips screwdriver 1 pc	150 mm 1 pc	SPC cable with data switch 05CZA662 (1 m) 05CZA663 (2 m)	468-988	1 - 2 in	Display unit 1 - 1.2 in 1 pc 1.2 - 1.6 in 1 pc 1.6 - 2 in 1 pc Setting ring (1.2 in DIA., 1.6 in DIA) 1 pc each Spanner 1 pc Hex wrench 1 pc Phillips screwdriver 1 pc	150 mm 1 pc	SPC cable with data switch 05CZA662 (1 m) 05CZA663 (2 m)
468-984	50 - 75 mm	Display unit 50 - 63 mm 1 pc 62 - 75 mm 1 pc Setting ring (ø62) 1 pc Spanner 1 pc Hex wrench 1 pc Phillips screwdriver 1 pc	150 mm 1 pc		468-989	2 - 3 in	Display unit 2 - 2.5 in 1 pc 2.5 - 3 in 1 pc Setting ring (2.5 in DIA) 1 pc Spanner 1 pc Hex wrench 1 pc Phillips screwdriver 1 pc	150 mm 1 pc	
468-985	75 - 100 mm	Display unit 75 - 88 mm 1 pc 87 - 100 mm 1 pc Setting ring (ø87) 1 pc Spanner 1 pc Hex wrench 1 pc Phillips screwdriver 1 pc	150 mm 1 pc		468-990	3 - 4 in	Display unit 3 - 3.5 in 1 pc 3.5 - 4 in 1 pc Setting ring (3.5 in DIA) 1 pc Spanner 1 pc Hex wrench 1 pc Phillips screwdriver 1 pc	150 mm 1 pc	

*1 Total 2 pcs of extension rods: 1 pcs of Part No. **952621** (for measuring range 12 to 16 mm, 16 to 20 mm) and Part No. **952622** (for measuring range 20 to 25 mm).
Two extension rods cannot be connected due to the different mounting positions.

*2 The measurement range cannot be enlarged by measuring heads that are not standard-supplied (the accuracy is not guaranteed).



468-981



468-982



468-983



468-984



468-985

Optional Accessories

Refer to page A-25 for details.
USB Input Tool Direct (2 m): **06AFM380B**
Connecting cables for **U-WAVE-T**
For standard (160 mm): **02AZD790B**
For foot switch: **02AZE140B**