


Trichloroethylene $\text{Cl}_2\text{C}:\text{CHCl}$

No.132LL

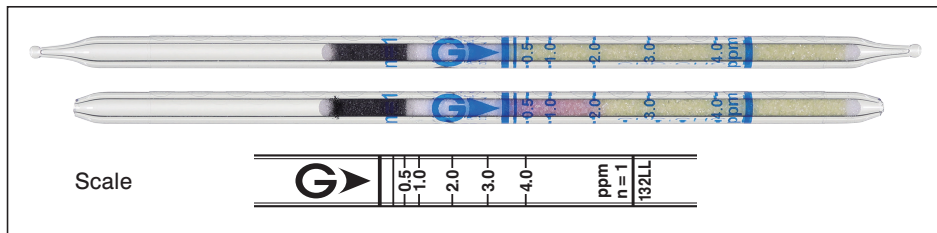


Performance The minimum scale value (0.25ppm) is not printed on the tube, but only the scale line is printed.

Measuring range	0.125 to 0.25 ppm	(0.25) to 4.0 ppm	4.0 to 8.8 ppm
Number of pump strokes	2 (200 mL)	1 (100 mL)	1/2 (50 mL)
Correction factor	1/2	1	2.2
Sampling time	3 min	1.5 min	45 sec

Detecting limit : 0.05 ppm (2 pump strokes)
 Colour change : Yellow → Purple
 Operating conditions : Temperature 0 to 40 °C (32 to 104 °F) correction used
 Relative humidity 0 to 90 % correction not used
 Relative standard deviation : 10 % (for 0.25 to 1.0 ppm), 5 % (for 1.0 to 4.0 ppm)
 Tube quantity and number of tests per box : 10 tubes for 10 tests
 Shelf life : 24 months (in the refrigerator)

Reaction principle



Possible coexisting substances and their interferences

Substance	Concentration	Interference	Changes colour by itself to
Bromine, Chlorine	$\geq 1/2$	+	Purple
Hydrogen chloride	$\geq 1/2$	+	
Tetrachloroethylene	$\geq 1/2$	+	
1,1,1-Trichloroethane	≥ 80 ppm	No	No (≤ 80 ppm)
Toluene, Xylene		No	No

Other substances measurable with this detector tube

Substance	Correction	No. of pump strokes	Measuring range
1,2-Dichloroethylene	Factor : 1.5	1	0.375 to 6.0 ppm
Dichlorvos	Factor : 0.45	2	0.11 to 1.8 ppm

Calibration gas generation

Diffusion tube method

Special note

This detector tube can also be used with the Gastec Water Pollutant Analysis Systems to measure trichloroethylene in the water. With these systems, samples are collected by using a syringe.